





足立特殊测器(厦门)有限公司 NTS INSTRUMENT (XIAMEN) CO., LTD.  
 壕门电子科技(厦门)有限公司 HOPE TECHNOLOGIC (XIAMEN) CO., LTD.

# NA6 (原NCA) 称重传感器 (Former NCA) LOAD CELL

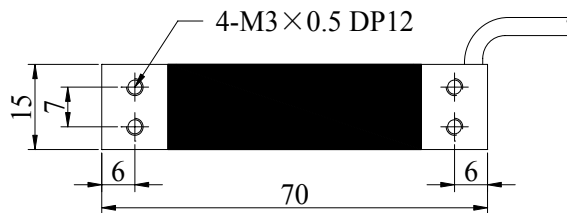

俯视(Top View)

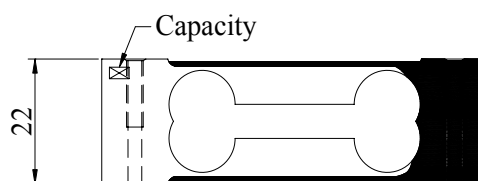

主视(Front View)

用途特点: 计价秤、计数秤、天平秤

Usage & Features: Pricing Scale, Counting Scale, Balance

## 技术参数 Technical Parameter

额定负荷 Rated Capacities	0.3, 0.6, 0.75, 1, 2, 3, 5, 7, 10 (kg)
额定输出 Rated Output	1.0 mV/V $\pm$ 10%; 1.5 mV/V $\pm$ 10%; 2.0 mV/V $\pm$ 10%
非线性 Non-linearity	0.02 %F.S
滞后 Hysteresis	0.02 %F.S
重复性 Repeatability	0.02 %F.S
蠕变 (20分钟) Creep(20min)	0.02 %F.S
输出温度影响 Temperature Effect On Output	0.002 %F.S
零点温度影响 Temperature Effect On Zero	0.003 %F.S
零点平衡 Zero Balance	$\pm$ 0.0200 mV/V
输入阻抗 Input Impedance	410 $\pm$ 15 $\Omega$ ; 1130 $\pm$ 30 $\Omega$
输出阻抗 Output Impedance	350 $\pm$ 5 $\Omega$ ; 1000 $\pm$ 10 $\Omega$
绝缘阻抗 Insulation Impedance	$\geq$ 5000 M $\Omega$
安全过载率 Safe Overload	150 %F.S
极限过载率 Ultimate Overload	200 %F.S
工作温度范围 Operating Temperature Range	-20~60 $^{\circ}$ C
推荐工作电压 Recommended Excitation	5~12 VDC
最大工作电压 Maximum Excitation	15 VDC
材质 Construction	铝合金 Aluminum Alloy
防护等级 Protection Class	IP66 / IP67
电缆 Cable	$\phi$ 3 $\times$ 30 cm
台面尺寸 Platform Size	200 $\times$ 200 mm
接线方式 Mode of Connection	红: 电源+, 黑: 电源-, 绿: 信号+, 白: 信号- Red (EXC+), Black (EXC-), Green (SIG+), White (SIG-)

地址: 厦门市湖里区悦华东路恒盛大厦三楼 (Address: 3FL HENG SHENG BUILDING YUE HUA E. RD. HU-LI XIAMEN CHINA)

TEL: +86-592-5629881/882 FAX: +86-592-5629883 <http://www.mavin.cn> E-mail: [mavin@mavin.cn](mailto:mavin@mavin.cn)